


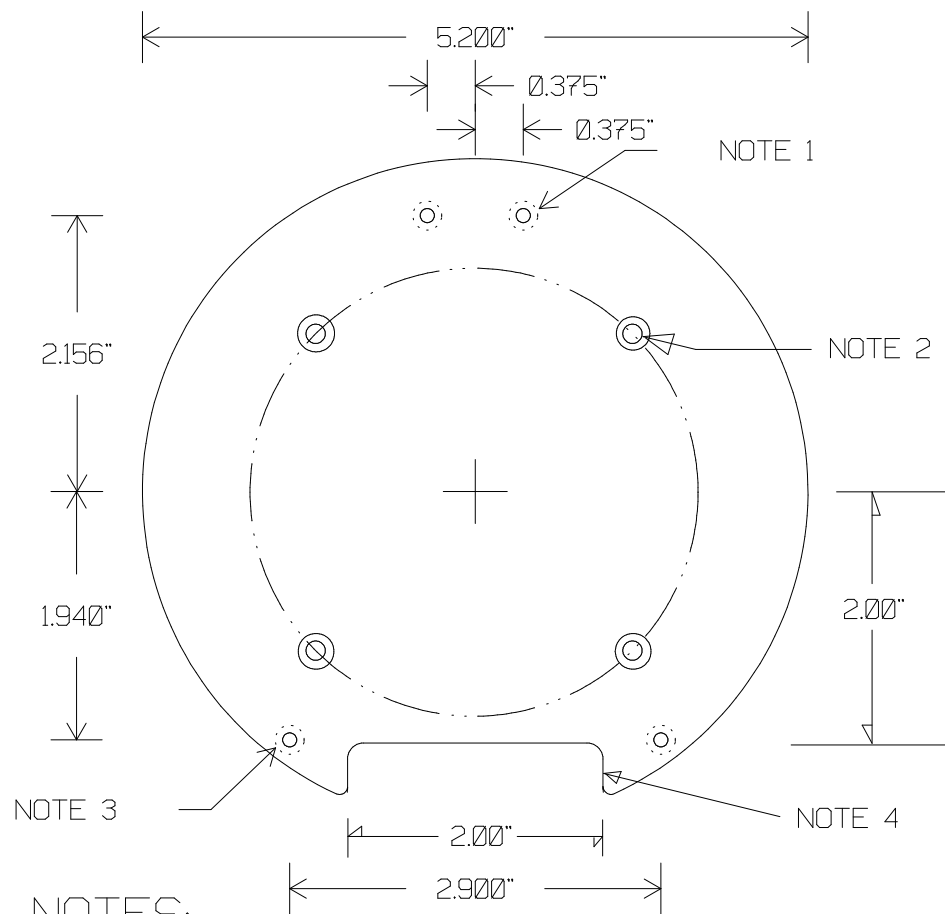

NOTES:

1. Drill #32 2 places
C/S 82 deg for 4-40 FH on bottom
2. Drill #18 on 3.5" BC. 4 places
@ 45 deg as shown
C/S 82 deg for 8-32 FH on top
3. Drill #32. 2 places as shown
C/S 82 deg for 4-40 FH on bottom
4. Round all edges of cutout. .125" radius

TAPS-6 BOTTOM PLATE

MATL: 1/8" Aluminum plate
6061-T6

DATE: 970910

REV: 1.01

DWG: T6116

