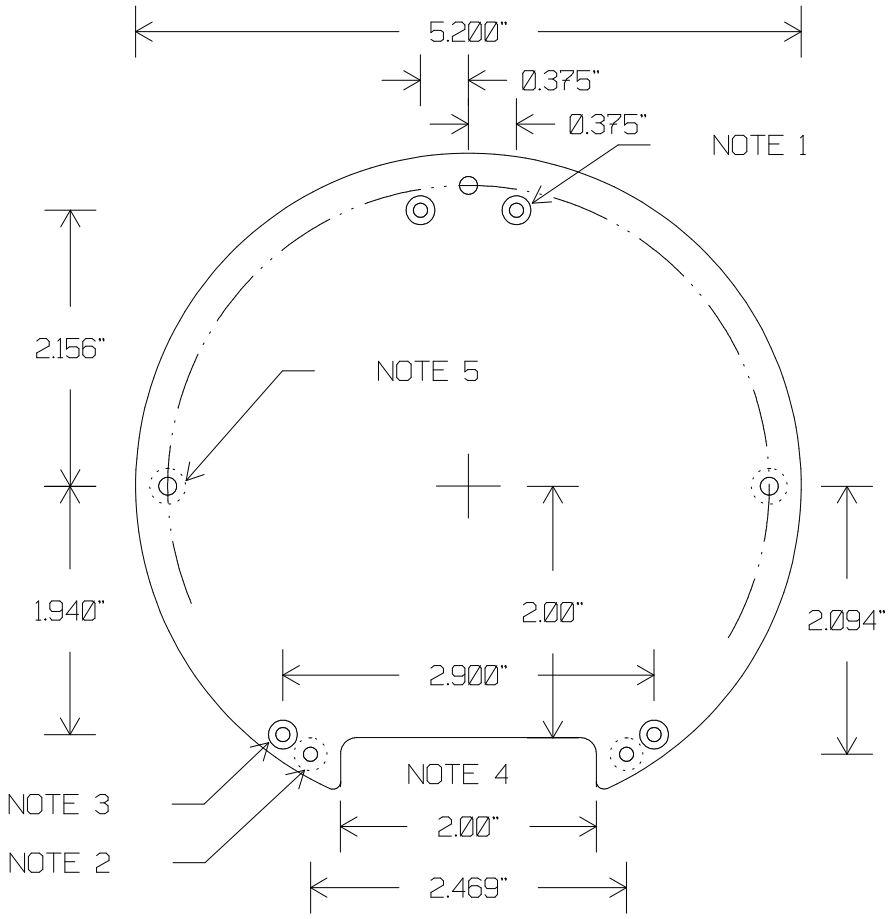

NOTES:

1. Drill #32 2 places
   C/S 82 deg for 4-40 FH on top
2. Drill #32, 2 places as shown
   C/S 82 deg for 4-40 FH on bottom
3. Drill #32, 2 places as shown
   C/S 82 deg for 4-40 FH on top
4. Round all edges of cutout, .125" radius
5. Drill #27 on 4.70" BC, 3 pl; C/S 82 deg for
   6-32 FH on bottom, 2 pl as shown

TAPS-6 MIDDLE PLATE

MATL: 1/8" Aluminum plate
6061-T6
DATE: 970910
REV: 1.00
DWG: T6118

TRACOR INC.

C:\General Cadd 3\DRAWINGS\NewTAPS\T6118.gxd -- 12/04/2009 -- 09:56 AM -- Scale 1 : 1.500